


## 4.0 DIMENSIONS AND PERFORMANCE

### 4.1 Dimensions

DN		Dimensions (mm)					
Inch	mm	L	H	D	D1	b	n-ΦL
2"	50	206	170	152	120.5	16	4-Φ19.1
2.5"	65	211	195	178	139.5	17.5	4-Φ19.1
3"	80	249	215	191	152.5	19	4-Φ19.1
4"	100	320	255	229	190.5	24	8-Φ19.1
6"	150	414	360	279	241.5	25.5	8-Φ22.2
8"	200	500	450	343	298.5	28.5	8-Φ22.2
10"	250	605	550	406	362	30.5	12-Φ25.4
12"	300	724	645	483	432	32	12-Φ25.4
14"	350	734	700	533	476	35	12-Φ28.5
16"	400	991	790	597	540	36.5	16-Φ28.5

### 4.2 KV rates

DN	50	65	80	100	125	150	200	250	300	350	400
Kv	41	53	105	175	285	402	730	1160	1400	1770	3010

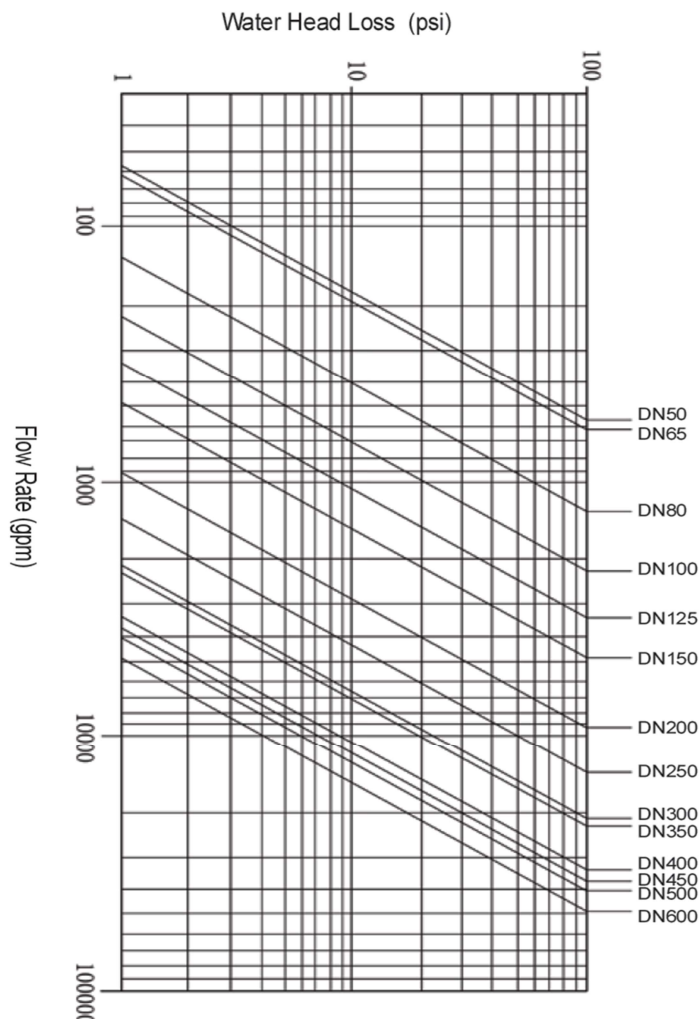

For ASME B16.1 Class 125 double-flanged pressure relief & sustaining valves